

# Alishield Range F3

## Technical Specifications



[www.hag.co.uk](http://www.hag.co.uk)  
Advice Line 0800 072 3444

# Alishield Range F3



## What is it made from

The Alishield range of roller shutters offers an all aluminium construction.

## Typical Uses or Specific Use

Typical uses range are from Survery to Mall Security.

## Security Level

Medium Security Level.

## Benefit of product range

The Alishield Roller Shutter Range offers offering a stylish alternative to traditional products Security can be increased with the use of polycarbonate backing to prevent vandalism to the shopfront but also allowing vision to the shop display.

# Alishield Range F3



## Product Overview

### Description

Alishield Range F3, 50mm Flat single skin aluminium lath

### Common use

Survey and Cabinet Security

### Maximum Width

3500mm

### Lath Dimensions


Normally 52mm x 1.5mm

### Weight

6.4kg per square metre

### Finish

Mill finish aluminium as standard, Polyester powder coat colours and anodised finishes are available

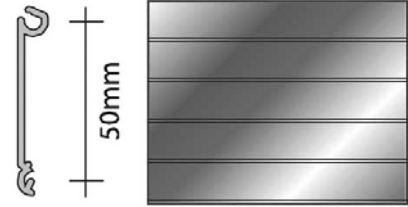

## Shutter Box Specification

### Construction

0.91mm bright spangle galvanised pressed steel coil casing available in various different designs to suit individual circumstances

### Box sizes

Overall height (top of box)

Up to 2800mm box size 254mm

Up to 3800mm box size 305mm

### Finish

Galvanised steel, polyester powder coat colours are available.

## Guide Rail Specification

### Construction

Standard guide rails 38mm x 29mm x 3mm aluminium (others Available on request) Electric shutters require a 50mm x 50mm box selection used to allow for the motor unit.

### Finish

Mill finish as standard, Polyester powder coat colours and anodised finishes are available.

# Alishield Range F3



## Operational Specification

### Spring Loaded

A counter balanced spring ensures controlled raising and lowering with a key in-built at the bottom of the shutter for security.

### Single Phase Electric

A tubular motor within the barrel assembly with limit switches and thermal cut out to prevent overheating. Draw 240 volts and 0.5 - 2.5 amps dependant upon the shutter size Provision of a 13 amp fused spur is required for installation

### Override

A manual override is included to operate the shutter in the event of a power failure. This is operable from one side only.

### Control

Standard security key switch or rocker switch. Other controls are available on request.

---

Product specification may change and it is advisable to consult with HAG technical advisors before specifying or ordering. HAG operates a policy of continuous improvement.

---

Visit our website for more information on HAG Roller Shutters [www.hag.co.uk/roller-shutters.html](http://www.hag.co.uk/roller-shutters.html)

---

For further information about this product please call the HAG advice line on 0800 072 3444 or email [info@hag.co.uk](mailto:info@hag.co.uk)

---