

# Armourguard Range F2

## Technical Specifications



[www.hag.co.uk](http://www.hag.co.uk)  
Advice Line 0800 072 3444

# Armourguard Range F2



## What is it made from

The Armourguard range offers all-steel construction.

## Typical Uses or Specific Use

Typical uses range from Shop front Security to Industrial Door.

## Security Level

Medium to high security dependant on model specification.

## Benefit of product range

Capable of spanning up to 12000mm in width, The Armourguard range can offer flexibility by combining multiple models to alter ventilation and visual appearance.

---

For further information about this product please call the HAG advice line on 0800 072 3444 or email [info@hag.co.uk](mailto:info@hag.co.uk)

---

# Armourguard Range F2



## Product Overview

### Description

Armourguard F2, 100mm Twinned skinned 22 gauge galvanised lath HP200 plastisol colour coated finish to outside and inside if required.

### Common use

Loading Bay & Warehouse Doors Where Insulation is required

### Maximum Width

12000mm

### Dimensions


Normally 100mm x 27mm foam filled

### Weight

18.4kg square metre

### Finish

GHP200 is British Steel's roofing and cladding steel with a 2000 micrometre (nominal thickness) high-performance plastisol coating on a galvatite hot dip zinc coated substrate to BS EN 10146. The standard reverse side coating is a specially formulated two coat protective system of corrosion resistant primer topped with a heat cured high performance polyester.

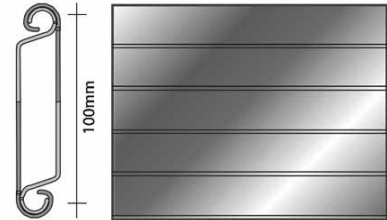

## Shutter Box Specification

### Construction

0.91mm bright spangle galvanised pressed steel coil casing available in various different designs to suit individual circumstances.

### Box sizes

Overall height (top of box)

Up to 3000mm box size 400mm

Up to 4000mm box size 450mm

Up to 5000mm box size 510mm

### Finish

HP200 is British Steel's roofing and cladding steel with a 2000 micrometre (nominal thickness) high-performance plastisol coating on a galvatite hot dip zinc coated substrate to BS EN 10146. The standard reverse side coating is a specially formulated two coat protective system of corrosion resistant primer topped with a heat cured high performance polyester.

## Guide Rail Specification

### Construction

Standard guide rails are 90x32x3mm galvanised steel.

# Armourguard Range F2



## Operational Specification

### Hand Chain Operation (Industrial)

A counter balanced helical spring controlled via hand chain and chain lock to secure.

### Three Phase Electric

Conventional or direct drive industrial motor unit with integral travel limits, thermal cut out, low level hand chain override or high level hand crank override and push button control as standard.

---

Product specification may change and it is advisable to consult with HAG technical advisors before specifying or ordering. HAG operates a policy of continuous improvement.

---

Visit our website for more information on HAG Roller Shutters [www.hag.co.uk/roller-shutters.html](http://www.hag.co.uk/roller-shutters.html)

---

For further information about this product please call the HAG advice line on 0800 072 3444 or email [info@hag.co.uk](mailto:info@hag.co.uk)

---