

Armourguard Range P1

Technical Specifications



www.hag.co.uk
Advice Line 0800 072 3444

Armourguard Range P1



What is it made from

The Armourguard range offers all-steel construction.

Typical Uses or Specific Use

Typical uses range from Shop front Security to Industrial Door.

Security Level

Medium to high security dependant on model specification.

Benefit of product range

Capable of spanning up to 3500mm in width, The Armourguard range can offer flexibility by combining multiple models to alter ventilation and visual appearance.

Product Overview

Description

Armourguard P1, 50mm Flat, galvanised 20 gauge lath with 3mm perforations. (30% Vision)

Common use

Kiosk, Bars & shop fronts where vision or ventilation is required

Maximum Width

3500mm

Dimensions


Normally 50mmx 0.91mm

Weight

13kg per square metre

Finish

Galvanised bright rolled mild steel, polyester powder coat colours are Available.

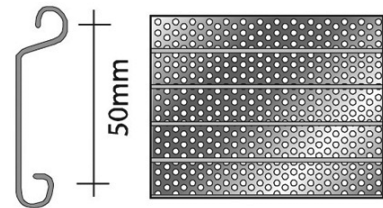

Armourguard Range P1



Shutter Box Specification

Construction

0.91mm bright spangle galvanised pressed steel coil casing available in various different designs to suit individual circumstances.

Box sizes

Overall height (top of box)

Up to 2050mm box size 254mm

Up to 2800mm box size 305mm

Up to 3500mm box size 355mm

Finish

Galvanised steel standard polyester powder coat colours are available at an additional cost.

Guide Rail Specification

Construction

Standard guide rails: 38mm x 32mm x 3mm - 67mm x 32mm x 3mm dependant on width. Electric shutters require a 50mm x 50mm steel box section (both sides) used to allow for motor unit and safety brake.

Finish

Galvanised steel standard polyester powder coat colours are available.

Operational Specification

Spring Loaded

A counter balanced spring ensures controlled raising and lowering with a key lock in-built at the bottom of the shutter for security.

Single Phase Electric

A tubular motor within the barrel assembly with limit switches and thermal cut out to prevent overheating.

Draw 240 volts and 0.5 - 2.5 amps dependant upon the shutter size

Provision of a 13 amp fused spur is required for installation

Override

A manual override is included to operate the shutter in the event of a power failure. This is usually only Operable from only one side.

Control

Standard security key switch or rocker switch.

Other controls are available on request

Product specification may change and it is advisable to consult with HAG technical advisors before specifying or ordering. HAG operates a policy of continuous improvement.

Visit our website for more information on HAG Roller Shutters www.hag.co.uk/roller-shutters.html

For further information about this product please call the HAG advice line on 0800 072 3444 or email info@hag.co.uk
