

Armourguard Industrial F1

Technical Specifications



www.hag.co.uk
Advice Line 0800 072 3444



What is it made from

The Armourguard industrial door range offers all-steel construction.

Typical Uses or Specific Use

Typical uses range from Shop front Security to Industrial Door.

Security Level

Medium to high security dependant on model specification.

Benefit of product range

Capable of spanning up to 12000mm in width depending upon model. The Armourguard range can offer flexibility by combining multiple models to alter ventilation and visual appearance.

Product Overview

Description


The Armourguard F1 is an Industrial insulated roller shutter constructed from a twin skin steel lath injected with CFC free foam insulation.

These insulated industrial doors are manufactured from two skins of a solid 100mm flat galvanised steel section.

The F1 insulated door uses a continuous nylon end locking system and a weather proof profile that is incorporated on to the bottom section to create a seal that increases its reliability and performance.

A brush strip can be used at high level to reduce air flow between the lintel and the roller shutter head plate. Glazed panels can also be incorporated into the roller shutter lath.

- Wind Load Tested BS EN 13241-1:2003 (class 5)
- Acoustic value of 28dB reduction (At 1kHz)
- Thermal Value 0.733 W/m²K (through centre of lath)

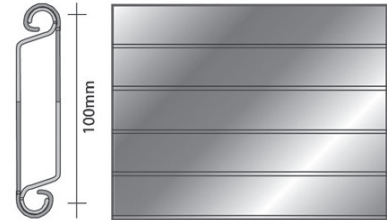

Common use

The Armourguard Industrial F1 is the ideal roller shutter for insulating large industrial openings against heat, noise and energy loss. This product is commonly used on industrial applications where insulation, sound proofing and security is the priority, such as industrial premises loading bay doors, warehouse doors, storage facilities, agriculture premises, barns and industrial units.

Maximum Width

12000mm

Dimensions

100mm x 27mm foam filled

Weight

16.5kg square metres

Finish

Galvanised bright rolled mild steel, polyester powder coat colours are available.

Shutter Box Specification

Construction

0.91mm bright spangle galvanised pressed steel coil casing available in various different designs to suit individual circumstances.

Box sizes

Overall height (top of box)

Up to 3000mm box size 400mm

Up to 4000mm box size 450mm

Up to 5000mm box size 510mm

Finish

Galvanised steel standard but these industrial doors are also available in a range of polyester powder coat colours.

For further information about this product please call the HAG advice line on 0800 072 3444 or email info@hag.co.uk

Guide Rail Specification

Construction

Standard guide rails are 90mm x 32 x 3mm galvanised steel. Double sided brush seal and carriers are used on the guide section to minimise air leakage.

Finish

Galvanised steel standard, polyester powder coat colours are available.

Operational Specification

Three Phase Electric

Conventional or direct drive industrial motor unit with integral travel limits, thermal cut out, complete with haul chain override for use in the event of power failure. Safety brakes are used to prevent the roller shutter from closing in the event of motor failure inline with EU legislation. Electrical requirements are dependant on usage, further details on request.

Override

A chain override is included to operate the shutter in the event of a power failure. This is only operable from one side. High level hand crank override can be specified if required.

Hand Chain Operation

A counter balanced helical spring controlled via hand chain and chain lock to secure the C1 industrial door. A double spring unit is incorporated into the barrel assembly inline as a second device to prevent the roller shutter from closing in the event of single spring failure inline with EU legislation.

Control

Electric operation is via a standard push button control. Other controls are available on request. Further safety devices are available, dependant on requirements and operational circumstances.

Product specification may change and it is advisable to consult with HAG technical advisors before specifying or ordering. HAG operates a policy of continuous improvement.

Visit our website for more information on HAG Roller Shutters www.hag.co.uk/roller-shutters.html

For further information about this product please call the HAG advice line on 0800 072 3444 or email info@hag.co.uk
