

Armourdoor AD05 General Purpose


Steel Door

Technical Specifications



www.hag.co.uk
Advice Line 0800 072 3444

Armourdoor AD05 General Purpose Steel Door

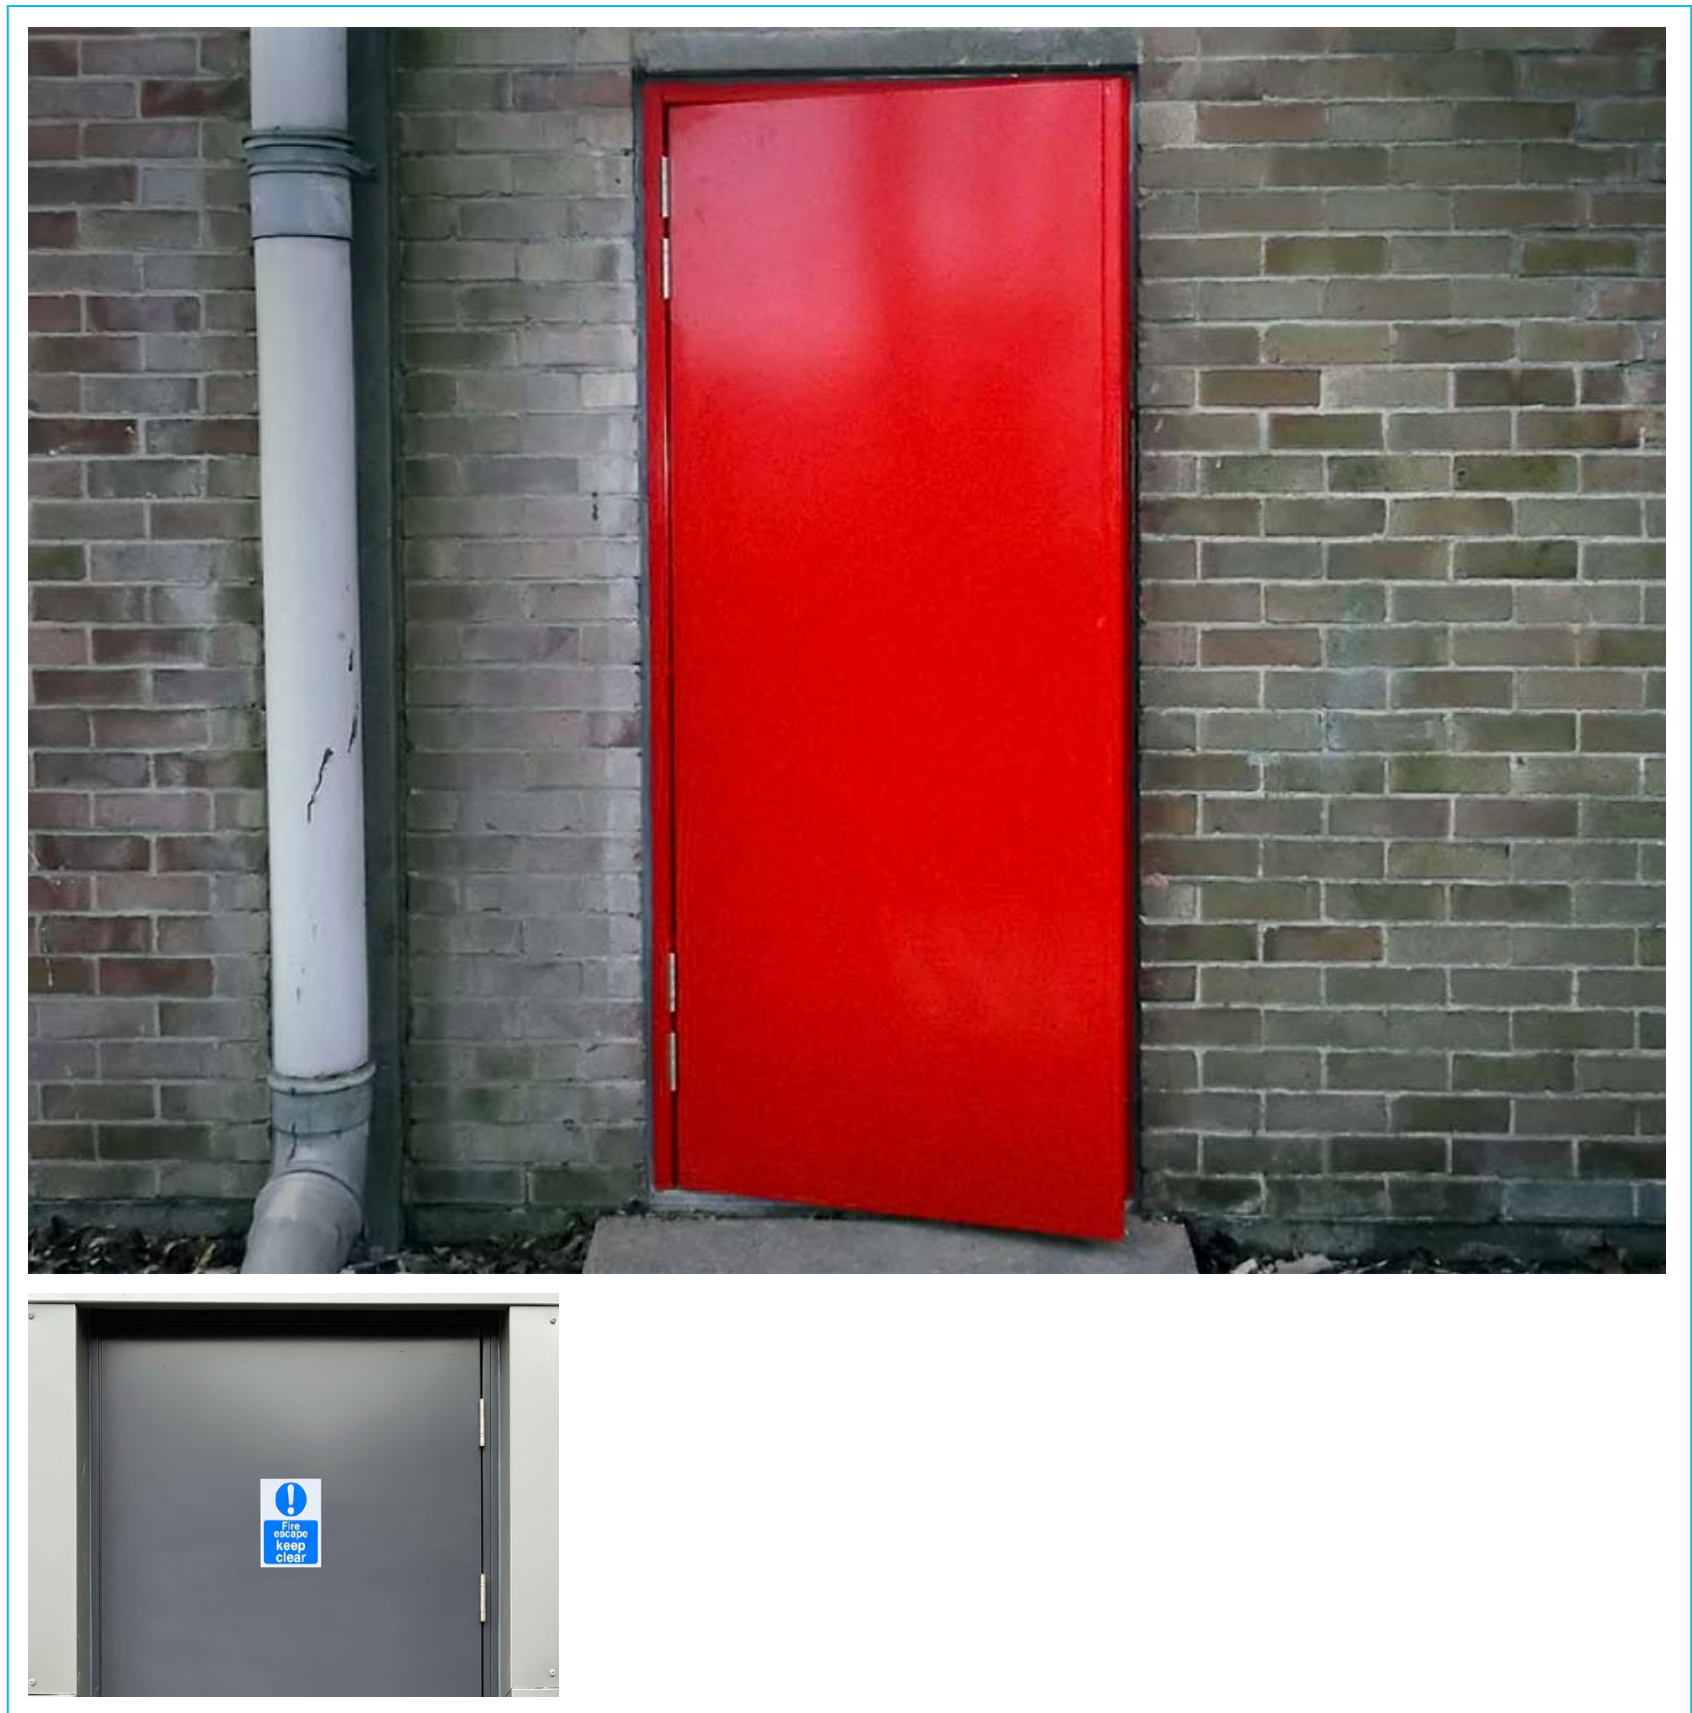

A versatile general purpose steel door offering a medium level of security. Manufactured from zinc-protected steel sheets, with a choice of infill and finishes, including powder coating. Choose from a manual or electrical operation. Available in single or double leaf openings to a maximum height of 2900 mm.

Product Overview

Operation

The AD05 general purpose steel security door can come in a manual or electric operation.

Dimensions:

Single openings from 690mm to 1350 mm

Armourdoor AD05 General Purpose Steel Door

Double openings from 1290mm to 2800 mm
All at heights up to 2900 mm

Finish

The Armourdoor AD05 general purpose steel door is available in a range of finishing from powder coated (from a standard range of colours), wood grain, PVC laminate and stainless steel.

Specification of Build

The general purpose steel door leaf thickness is 48mm. As standard the core of the steel door is a honeycomb core, with the option of solid timber or rock wool to improve security and insulation.

The door frame is constructed from folded 1.6 mm Zintec/aluzinc steel and supplied with an adjustable sub-frame providing 30 mm tolerance for ease of site installation.

The frame is fitted with dog bolts for the hinges as standard. The door is supplied with a standard 15 mm rebated threshold, driveable thresholds are available as an option.

A wide range of hardware options are available and factory-fitted to allow for rapid site installation. Minimal site assembly may be required for double steel doors and hardware items such as door closers.

Part of HAG's extensive range of specialist steel doors.

Product specification may change and it is advisable to consult with HAG technical advisors before specifying or ordering. HAG operates a policy of continuous improvement.

