


# Swing Commercial Gates

Technical Specifications



[www.hag.co.uk](http://www.hag.co.uk)  
Advice Line 0800 072 3444

# Swing Commercial Gates

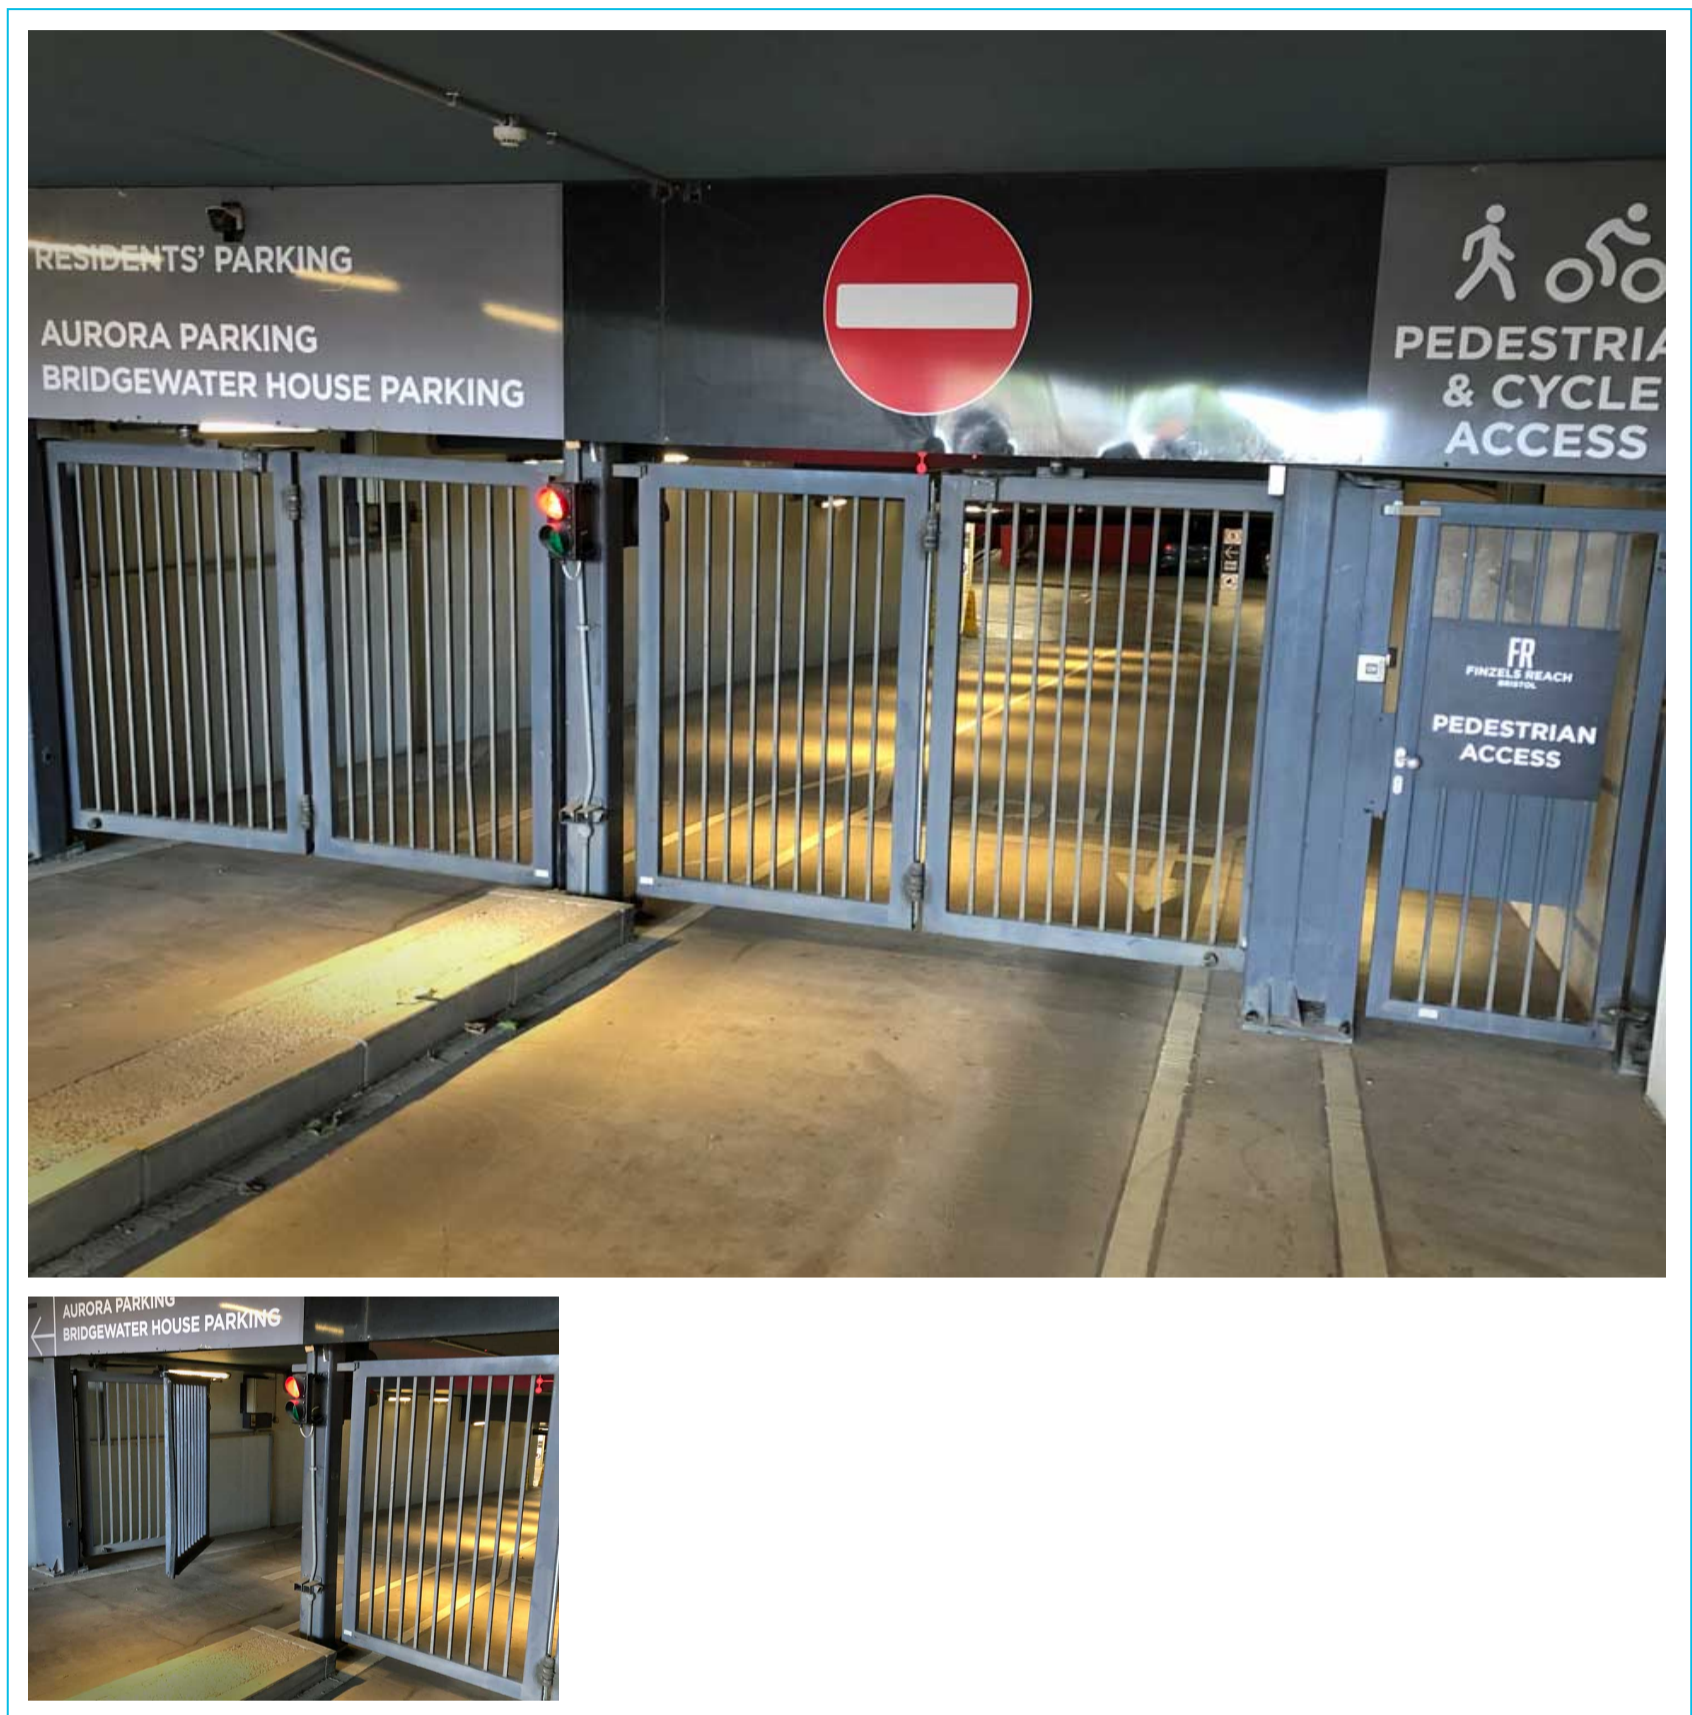

Swing gates designed for external commercial use to provide reliable security. Recommended max width 8000 mm (4000 mm per leaf). Galvanised steel finish as standard with powder coating options available upon request.

## Product Overview

### Description

Swing commercial gate providing access control.

### Benefit of Product Range

Provides reliable security and privacy to industrial and commercial properties. Features comprehensive safety features.

# Swing Commercial Gates

## Common use

A product applicable to domestic and commercial premises requiring 24-hour security/privacy. Minimal noise and used in underground and above car parks, private driveways, and various other locations to control entering and exiting to given users.

## Maximum width

Generally up to an 8000 mm opening (4000 mm wide per leaf). Can be up to 14,0000 mm opening if required (7000 mm per leaf). This depends upon the size and style of gates.

## Maximum height

Maximum height 2200 mm.

## Typical Arrangements

Single leaf gate or pair of gates.

## Operation

Specified by the user at the time of quoting. Card/fob reader, remote, ground loop, intercom, keypad etc.

## Security

Locking via mechanical opening and closing. Card swipe or key pad entry available. Manual release handles as standard.

## Safety features

Photocells, safety edges, safety ground loop and inbuilt safety control to automation.

## Finish

Galvanised steel as standard with a choice of standard powder-coat colours

## Other options available

Intercoms, keypads, remote fobs, fob/card reader systems, free exit/entry ground loop, timeclock, push buttons.

---

Product specification may change and it is advisable to consult with HAG technical advisors before specifying or ordering. HAG operates a policy of continuous improvement.

---