

HAG Shutters & Grilles Ltd
 1 Oak Lane
 Fishponds
 Bristol
 BS5 7UY

Tel:0117 9654888
 Fax:0117 9657773
www.hag.co.uk
info@hag.co.uk

Disclaimer
 HAG operates a policy of continuous improvements, product specification may change and it is advisable to consult with HAG technical advisors before specifying or ordering.


Product: G3 Alulink Grille
Operation: Manual Spring & lock
Fixing: Reveal fixed or Face fixed
Finish: Mill finish Aluminium

Head plate sizes:
 Overall height: Upto 2000mm Head plate = 254mm
 Overall height: Upto 3000mm Head plate = 305mm

Minimum Side guide requirements:
 Overall width: Upto 1400mm Guide = 38mm X 32mm
 Overall width: Upto 2850mm Guide = 50mm X 32mm

Maximum width: 2850mm
Maximum height: 3000mm
Curtain weight: 8kgs per m2

Installation & Space requirements for standard manual shutter

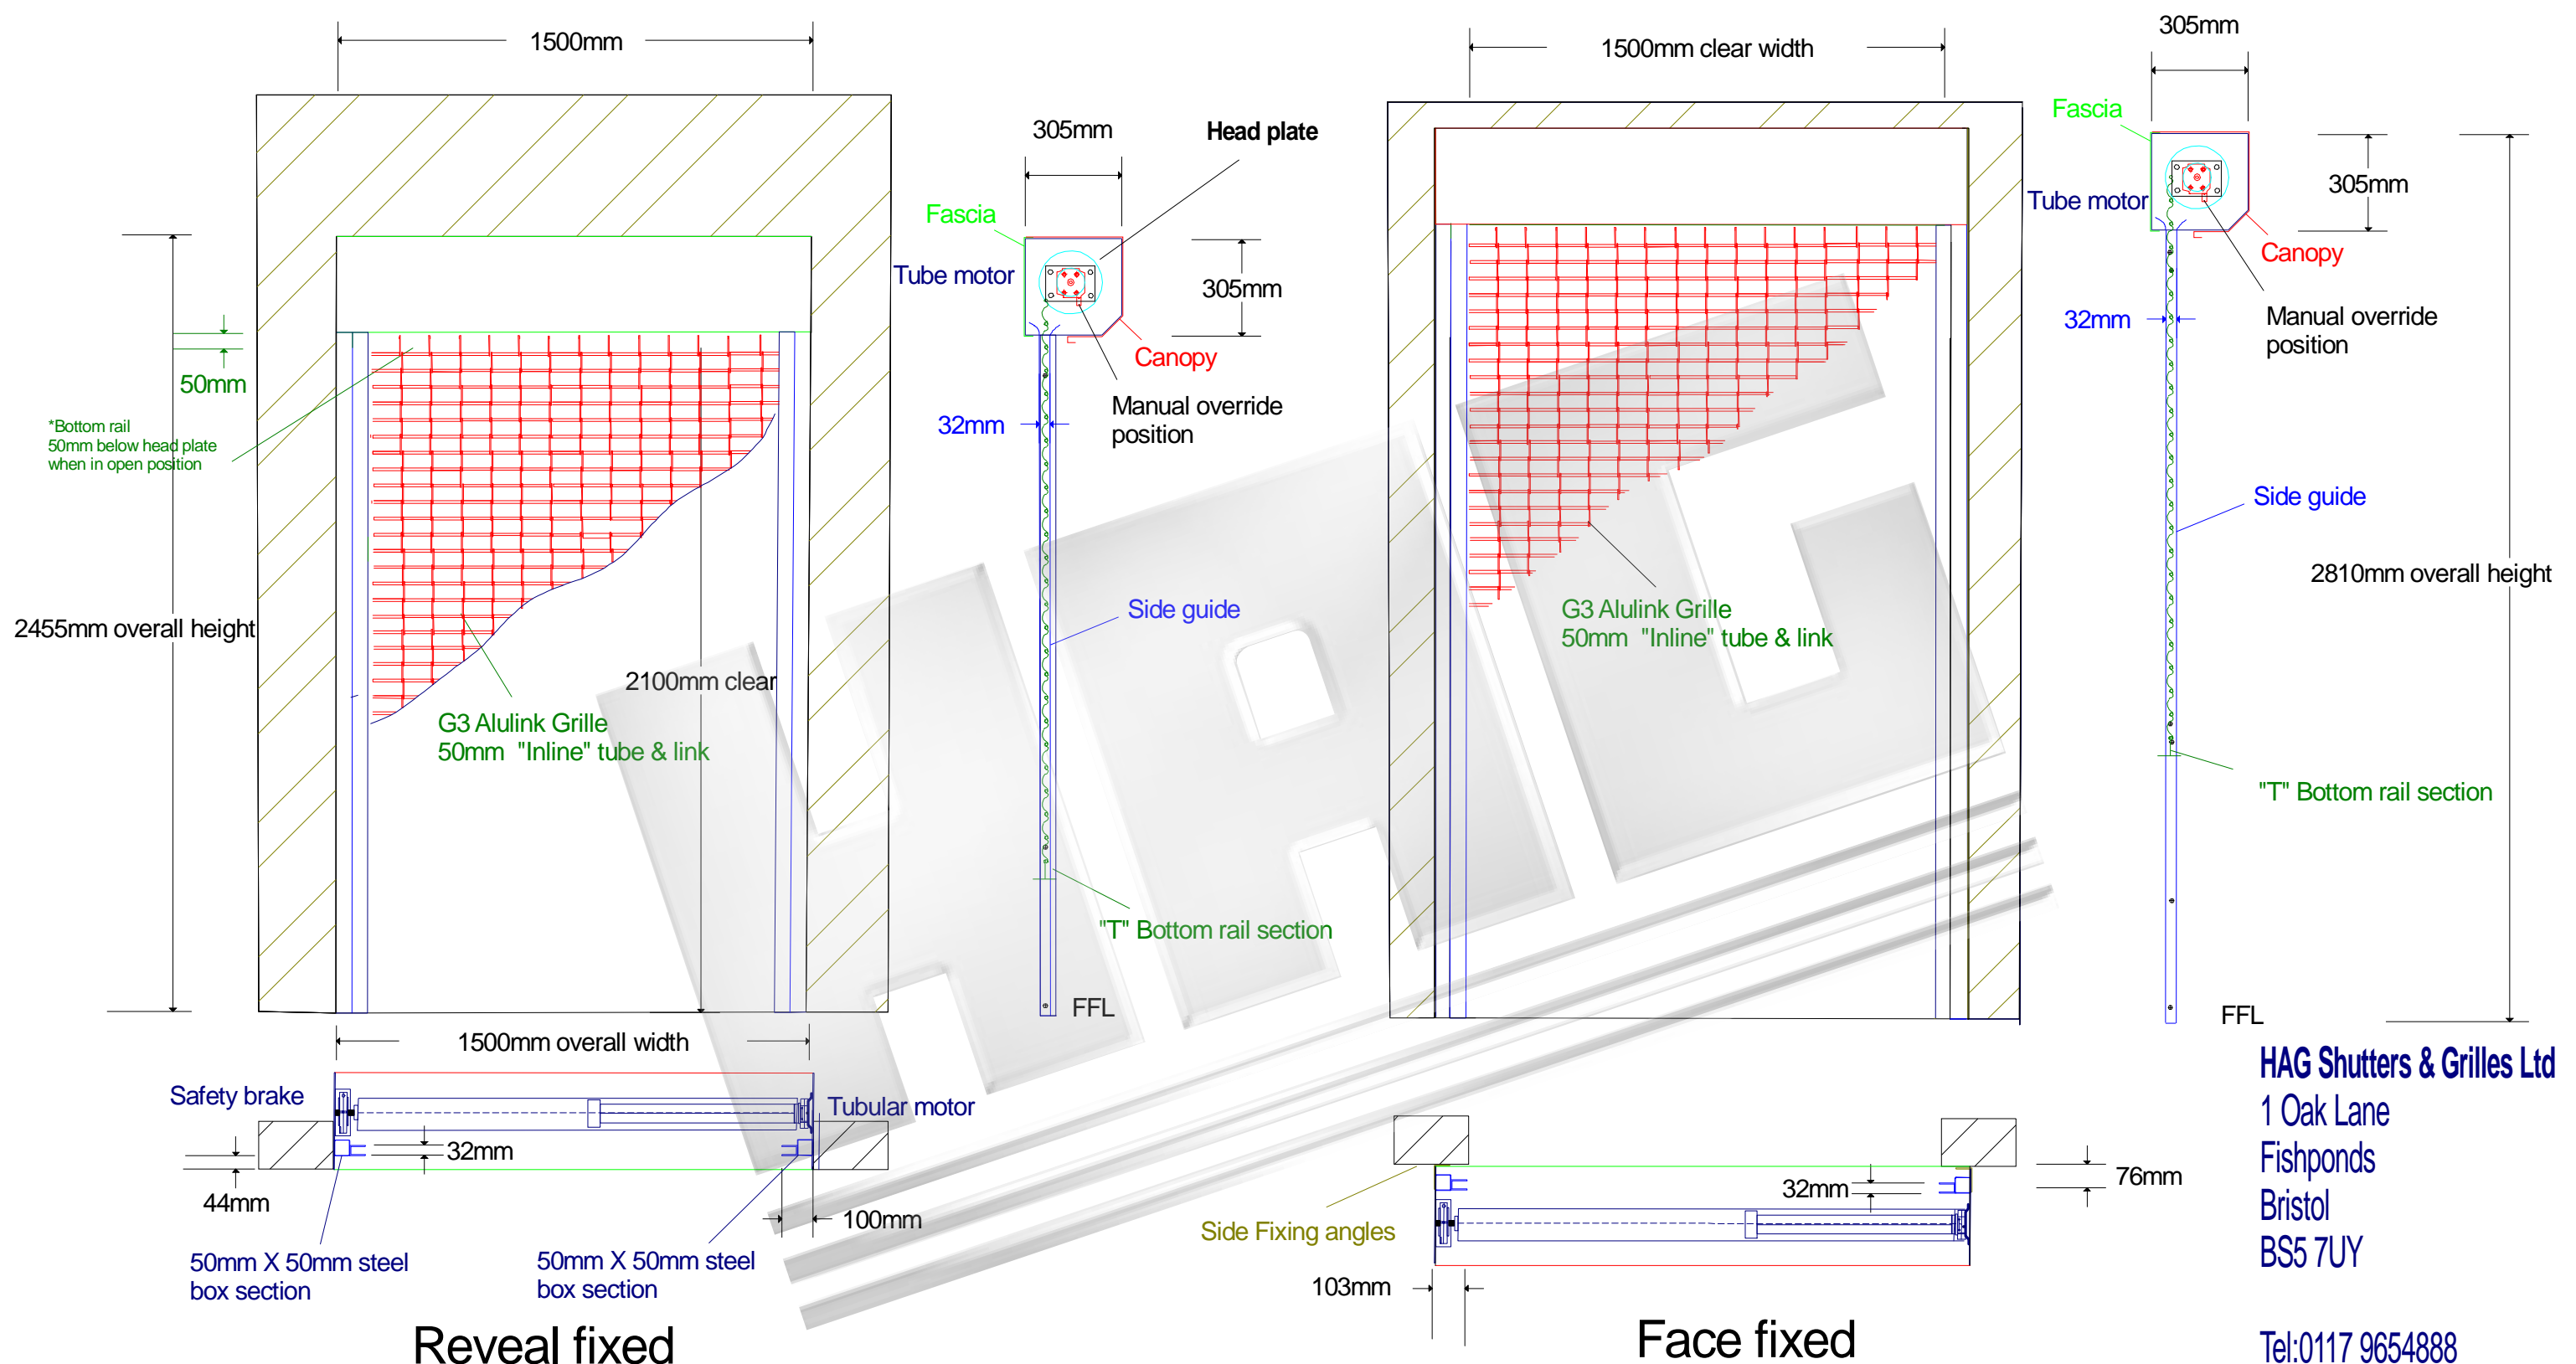

HAG Shutters & Grilles Ltd
 1 Oak Lane
 Fishponds
 Bristol
 BS5 7UY

Tel:0117 9654888
 Fax:0117 9657773
www.hag.co.uk
info@hag.co.uk

Disclaimer
 HAG operates a policy of continuous improvements, product specification may change and it is advisable to consult with HAG technical advisors before specifying or ordering.

Product: G3 Alulink
Operation: Single phase tube motor with override
Operator: security keyswitch
Power requirements: 13amp fused spur within 1 metre of opening
Fixing: Reveal fixed or Face fixed
Finish: Mill finish Aluminium

Head plate sizes:
 Overall height: Upto 2000mm Head plate = 254mm
 Overall height: Upto 3000mm Head plate = 305mm

Minimum Side guide requirements:
 Overall width: Upto 1400mm Guide = 38mm X 32mm
 Overall width: Upto 2850mm Guide = 50mm X 32mm

Maximum width: 2850mm
Maximum height: 3000mm
Curtain weight: 8kgs per m2

Installation & Space requirements for standard Electric shutter

Scale: 1:20 @ A3