


# Fireguard Range FG01

## Technical Specifications



[www.hag.co.uk](http://www.hag.co.uk)  
Advice Line 0800 072 3444

# Fireguard Range FG01

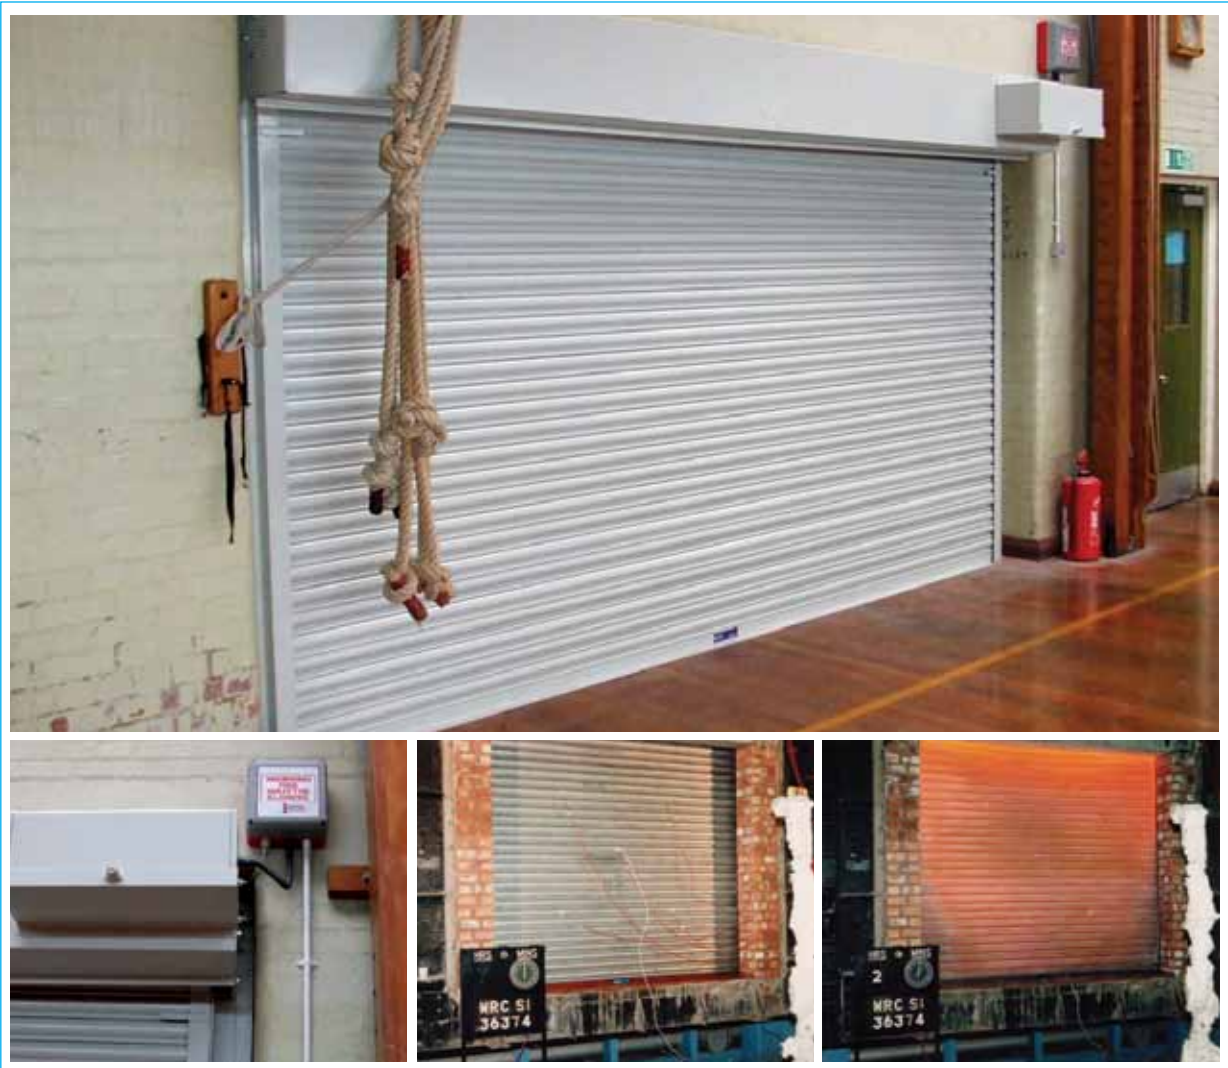

## What is it made from

The Certified fire guard range offers all-steel construction.

## Typical Uses or Specific Use

Specific use for when 1-4hour fire rating is required.

## Security Level

High security.

## Benefit of product range

Can be integrated into alarm systems.

---

For further information about this product please call the HAG advice line on 0800 072 3444 or email [info@hag.co.uk](mailto:info@hag.co.uk)

---

# Fireguard Range FG01



## Product Overview

### Description

Fireguard FG01, 76mm Curved, galvanised solid 20 gauge lath.

### Common use

Commercial and Industrial where 1-4 hour fire rating is required.

### Maximum Width

8000mm

### Dimensions


Normally 76mm x 0.9mm

### Weight

11.32kg per square metre

### Finish

Galvanised bright rolled mild steel but polyester powder coat colour's are available at additional cost.

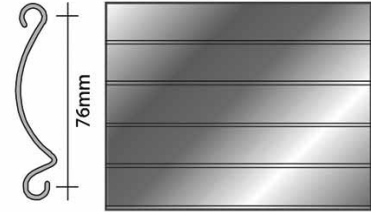

## Shutter Box Specification

### Construction

0.91mm bright spangle galvanised pressed steel coil casing available in various different designs to suit individual circumstances.

### Box sizes

Overall height (top of box)  
Up to 3500mm Box size 350mm

### Finish

Galvanised steel standard polyester powder coat colours are available at an additional cost.

## Guide Rail Specification

### Construction

63mm x 32mm x 3mm - 100mm x 32mm x 3mm Dependant on Width and Height

### Finish

Galvanised steel standard polyester powder coat colours are available.

# Fireguard Range FG01



## Operational Specification

Electrically operated through industrial grade 1 phase motor controlled by up/stop/close controller.  
Auto Reset solenoid for integration with fire alarm to enable the motor to automatically unbrake and close under controlled decent.

FCP03 Fire panel which can be interconnected to the Fire Alarm to allow closing when receiving Fire signal.  
Audio visual warning and timer delay

---

Product specification may change and it is advisable to consult with HAG technical advisors before specifying or ordering. HAG operates a policy of continuous improvement.

---

Visit our website for more information on HAG Roller Shutters [www.hag.co.uk/roller-shutters.html](http://www.hag.co.uk/roller-shutters.html)

---

For further information about this product please call the HAG advice line on 0800 072 3444 or email [info@hag.co.uk](mailto:info@hag.co.uk)

---